


PR2 with Optional Auxiliary Pump Drive

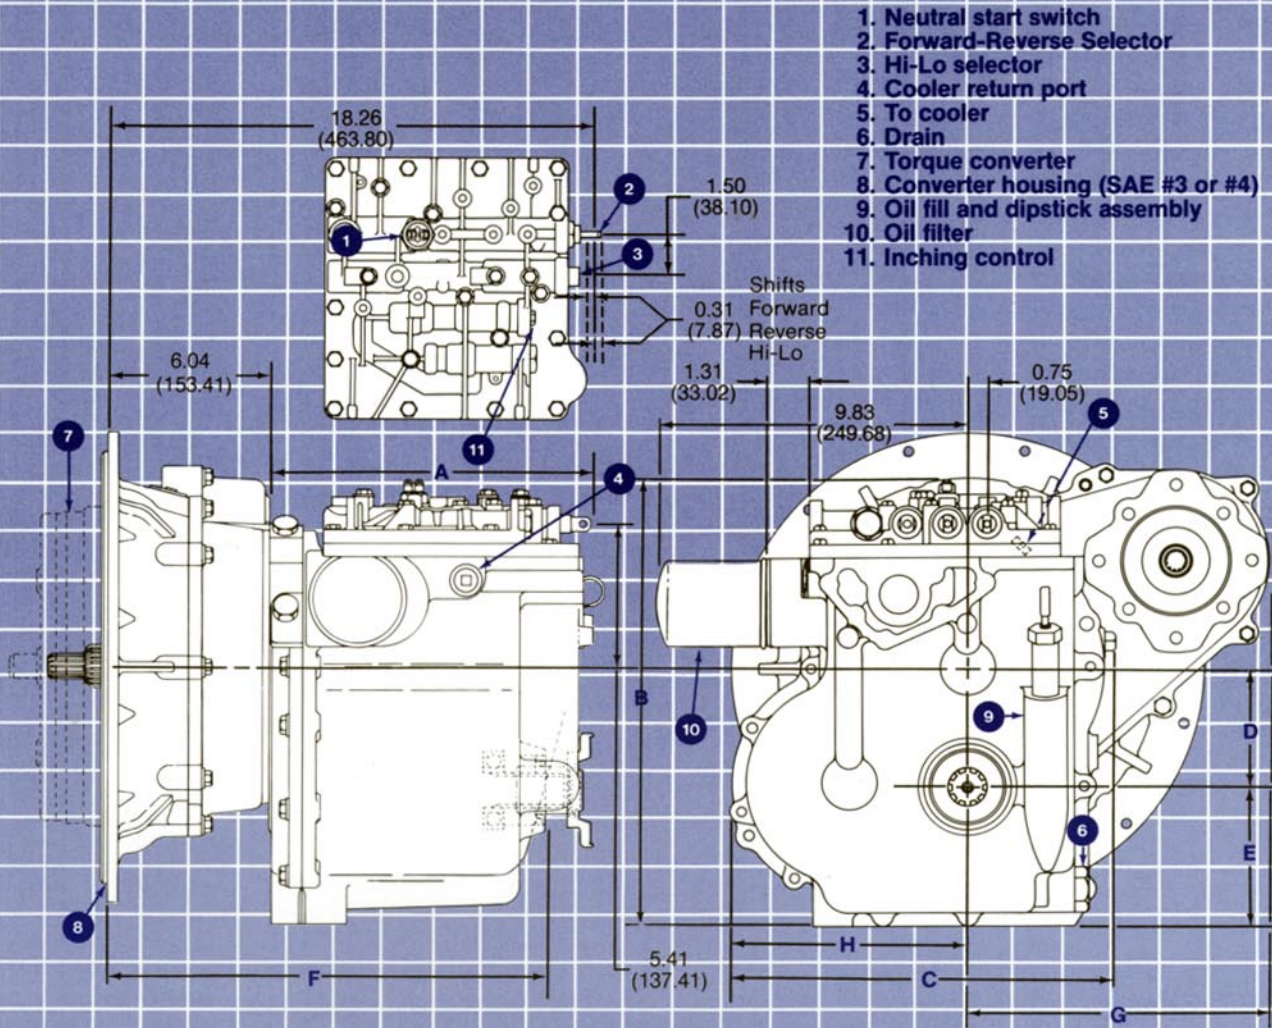

PR2 Auxiliary Pump Drive Dimensions inches (millimeters)

Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. H
14.10 (358.14)	16.86 (428.24)	16.19 (411.23)	4.51 (114.55)	5.44 (138.18)	17.30 (439.42)	11.19 (284.23)	10.63 (270.00)

PR2 Specifications nominal (subject to change without notice)

Ratio* high	1.03, 1.22:1
low	2.38, 2.55:1
Weight (dry, less converter)	293 lbs. (133.2 kg)
Controls , selector	mechanical-two spool electrical-optional
inching	mechanical
Spline , input	29 tooth, external involute
output	13 tooth, internal involute, flat root, side fit 16/32 D.P., 30° P.A., 0.8125 P.D.
Oil filter	standard
Auxiliary pump drive (see page 12 for installation information)	SAE B, 2 or 4 bolt, 60 hp. (44.7kW) max.-optional

*For other ratio possibilities contact Velvet Drive Transmissions.